



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2494563 A1 2004/03/04

(21) **2 494 563**

(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2003/07/18

(87) Date publication PCT/PCT Publication Date: 2004/03/04

(85) Entrée phase nationale/National Entry: 2005/02/01

(86) N° demande PCT/PCT Application No.: EP 2003/007880

(87) N° publication PCT/PCT Publication No.: 2004/019456

(30) Priorité/Priority: 2002/08/08 (102 36 361.7) DE

(51) Cl.Int.⁷/Int.Cl.⁷ H01R 13/66, H04Q 1/14


(71) Demandeur/Applicant:
KRONE GMBH, DE

(72) Inventeurs/Inventors:
BUSSE, RALF-DIETER, DE;
NIJHUIS, ANTONY, NL;
KLEIN, HARALD, DE;
STARK, JOACHIM, DE;
STORBECK, CARSTEN, DE

(74) Agent: G. RONALD BELL & ASSOCIATES

(54) Titre : MODULE DE CONNEXION DE DISPOSITIF DE DISTRIBUTION UTILISE EN TECHNIQUE DE
TELECOMMUNICATION ET DE TRAITEMENT DE DONNEES

(54) Title: DISTRIBUTOR CONNECTION MODULE FOR TELECOMMUNICATION AND DATA TECHNOLOGY

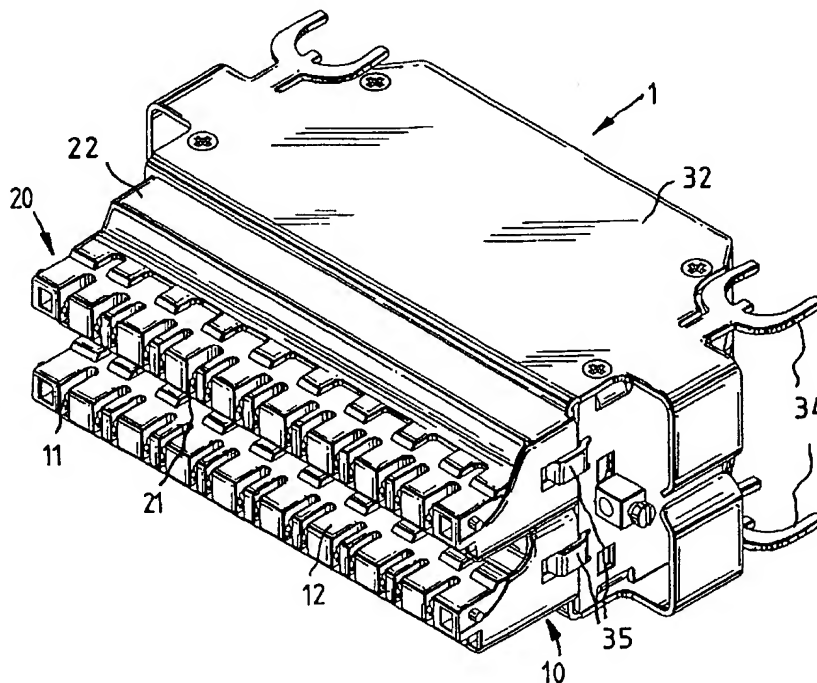

(57) Abrégé/Abstract:

The invention relates to a distributor module (1) for telecommunication and data technology, comprising a housing in which externally accessible input and output contacts (10, 20, 30, 40) are provided in order to connect lines and cores, said housing being provided with a cavity in which at least one printed circuit board (50) is arranged. The input and output contacts (10, 20, 30, 40) are arranged on opposite front faces of the housing. The input contacts (10, 20) are associated with an input side and the output contacts (30, 40) are associated with an output side. The input contacts (10, 20) are embodied in the form of at least two opposite rows of contacts and the output contacts (30, 40) are embodied in the form of at least one connector. At least two input contacts (10) of the first row and at least two input contacts (20) of the second row are connected to the output contacts (30, 40) of the at least one connector. The input contacts (10, 20) of the first and second row are connected to the output contacts (30, 40) of the connector by means of the at least one printed circuit board (50).



ABSTRACT**Distribution box connection module for telecommunications and data technology**

The invention relates to a distribution box connection module (1) for telecommunications and data technology, comprising a housing in which externally accessible input and output contacts (10, 20, 30, 40) are arranged for the connection of cables and cores, with the housing having a cavity in which at least one printed circuit board (50) is arranged, with the input and output contacts (10, 20, 30, 40) being arranged on the opposite end faces of the housing, and with the input contacts (10, 20) being associated with one input side and the output contacts (30, 40) being associated with one output side, with the input contacts 10, 20) being in the form of at least two mutually opposite rows of contacts, and the output contacts (30, 40) being in the form of at least one plug connector, with at least two input contacts (10) in the first row and at least two input contacts (20) in the second row being connected to the output contacts (30; 40) in the at least one plug connector, and with the input contacts (10, 20) in the first row and in the second row being connected via the at least one printing circuit board (50) to the output contacts (30; 40) in the plug connector.

(Fig. 2)

**Distribution box connection module for telecommunications and
data technology**

The invention relates to a distribution box connection module for telecommunications and data technology as claimed in the preamble of patent claim 1.

Conventional distribution box connection modules for communications and data technology have two rows of connection contacts which are arranged on one end face of a housing. A distribution box connection module such as this is known, for example, from DE 27 25 551. The distribution box connection module has a first row of connection contacts on the cable face and, opposite this, a second row of connection contacts on the jumper face, in which case the contacts on the cable face may be regarded as input contacts while the contacts on the jumper face may be regarded as output contacts, although the information flow may be reversed. Center contacts are arranged between the rows, and test plugs or protection plugs can be inserted into them. One example of such protection plugs is three-point or five-point overvoltage protection modules or staggered protection circuits. If such overvoltage protection is now inserted into the center contacts, then this center tap, and in some cases also adjacent center taps, is or are no longer accessible for test purposes, and the overvoltage protection must be removed again for test purposes, so that the contact is not protected in this time.

A distribution box connection for telecommunications and data technology is known from DE 100 29 649 A1, comprising a housing in which externally accessible input and output contacts are arranged for the connection of cables or cores, with the housing having a cavity in which functional elements are arranged between the input and output contacts. The input and output contacts may in this case be arranged in the same end face of the housing or else on opposite end faces, with the input contacts being associated with one end face, and the output contacts being associated with the other end face. This results in clear separation between the cable face and the jumper face, with the individual cores and cables not interfering with one another.

STM1 interfaces, among others, are used in the transmission network between the nodes in the telecommunications network and are connected to a large number of transmitters and receivers which, for example, are formed by electronic units, and with the transmission capacity at the moment, for example, being 2 Mbit/s per channel.

The invention is thus based on the technical problem of providing a user-friendly distribution box connection module for telecommunications and data technology, in particular for use in transmission networks between the nodes.

The technical problem is solved by the subject matter in the features of patent claim 1. Further advantageous refinements of the invention are described in the dependent claims.

For this purpose, the input contacts are in the form of at least two mutually opposite rows of contacts, and the output contacts are in the form of at least one plug connector, with at least two input contacts in the first row and at least two input contacts in the second row being connected to the output contacts in the at least one plug connector, and with the input contacts in the first row and in the second row being connected via the at least one printed circuit board to the output contacts in the plug connector. In consequence, four cores can be associated one channel, with two cores being used for reception and two cores for transmission of data. On the output side, in this case, the jumpering via the plug connector is very simple, so that it is possible to use prefabricated cables.

On the input side, the distribution box connection module is user-friendly since all the cores for receiving data for the subscriber can be associated with one row of input contacts, and all the cores for transmitting data for a subscriber can be associated with the other row of input contacts. The input side thus provides clear separation between the transmission mode and the reception mode, in a similar way to that in conventional strip connectors, with the system face and jumper face being separated via the two rows of connection contacts. The electrical connection of the associated input contacts in the first row and in the second row to their shared plug connector is in this case made via the at least one printed circuit board.

In one preferred embodiment of the invention, the input contacts in the first row and in the second row are in the form of insulation displacement terminal contacts.

In a further preferred embodiment, the plug connectors are in the form of RJ-45 female connectors. In embodiments where one channel has only four associated cores, only four contacts of the RJ-45 female connector are connected in a corresponding manner to the input contacts, with the contacts 3-6 being connected, by way of example, while, the contacts 1, 2, 7, 8 remain unconnected (numbering of the contacts in accordance with RJ-45).

The plug connectors are preferably likewise arranged in two mutually opposite rows. In this case, the electrical connections between the input and output contacts are in some cases

crossed over, since two cores must be routed from each plug connector to the first row, and two cores must be routed from each plug connector to the second row of the input contacts.

In a further preferred embodiment, two mutually opposite printed circuit boards are thus arranged within the housing and are electrically connected to one another, with the crossover being provided via the electrical connection. The two printed circuit boards are preferably electrically connected via a flat ribbon cable. However, in principle, other electrical connections such as plug contacts are also feasible.

In a further preferred embodiment, functional and/or protection elements are arranged on the printed circuit board and are electrically connected between the input and output contacts, such as filter or amplifier circuits, or overvoltage protection elements.

In a further preferred embodiment, the housing is formed in two or more parts, with at least one part of the housing being composed of metal. In addition to a pleasant design, the metallic housing allows direct formation with at least one grounding clip, which is formed from the housing and can be connected via contact pads to the printed circuit board. Furthermore, the metal housing is preferably formed with connecting elements for profiled rods and/or rails.

In addition, the input contacts preferably have associated isolating contacts, with each contact pair preferably having its own associated isolating contact for measurement and test purposes. Switching or connection contacts may also be used instead of isolating contacts.

The invention will be explained in more detail in the following text with reference to a preferred exemplary embodiment. In the figures:

- Figure 1 shows a block diagram of a connection area around a distribution box connection module,
 - Figure 2 shows a perspective front view of a distribution box connection module,
 - Figure 3 shows a perspective rear view of the distribution box connection module,
 - Figure 4 shows a plan view of the distribution box connection module,
 - Figure 5 shows a perspective illustration of the printed circuit board with a front part, and
 - Figure 6 shows a perspective illustration of two printed circuit boards with a front part.
-

Figure 1 shows the distribution box connection module 1 in one possible environment within a telecommunications network. The distribution box connection module 1 has an input side E and an output side A, with the expressions input side and output side being used only for definition purposes here, since the information flow takes place in both directions. Two or more transmitter modules S_1-S_n and two or more receiving modules E_1-E_n are arranged on the input side E. The transmission and receiving modules are in each case designed, for example, for a transmission capacity of 2 MB/s and are in the form of electronics units. The individual transmission modules S_1-S_n may in this case also be combined in a higher-level transmitter unit SE. The receiving modules E_1-E_n may likewise be combined to form a receiving unit EE. The connection between the transmission and receiving units SE, EE is made via conventional telecommunications cables FK, with one core pair, for example, in each case being associated with one module. An STM1 module based on SDH technology is arranged on the output side A, with the connection between the output side A and STM1 module being made via prefabricated patch cables PK. Core pairs which are associated with a common channel from transmission and receiving modules are then combined in the distribution box connection module 1 and are passed as a "channel cable" to the STM1 module. On the input side E, the cores are in this case separated on the basis of the transmission and receiving mode, as will be explained in more detail later, while, in contrast, channel separation is provided on the output side. In this case, it should be noted that the transmission and receiving units SE, EE can also be formed jointly as an STM1 module, that is to say with the distribution box connection module 1 being arranged between two STM1 modules.

Figures 2 and 3 show perspective views of the distribution box connection module 1. The distribution box connection module 1 has a first row of input contacts 10 and a second row of input contacts 20, which are arranged opposite one another.

In the illustrated example, each row has sixteen insulation displacement terminal contacts 11, 21 for connection of eight double cores. A first row of output contacts 30 and a second row of output contacts 40 are arranged on the opposite end face, with four output contacts in one row in each case being combined as a plug connector, in the form of an RJ-45 female connector 31, 41. The distribution box connection module 1 thus in each case has thirty-two input contacts 10, 20 and output contacts 30, 40. The distribution box connection module 1 also has two front parts 12, 22, which form a part of the housing and surround the input contacts 10, 20. The front parts 12, 22 are in this case preferably composed of plastic.

The output contacts 30, 40 are surrounded by two metallic side walls 32 and a metallic baseplate 33, which, together with the two front parts 12, 22, form the housing. The two side walls 32 can be screwed to the baseplate 33. The two side walls 32 each have two connecting elements 34, via which the distribution box connection module 1 can be latched onto a profiled rod system, which is not illustrated. The two front parts 12, 22 are connected to the baseplate 33 via latching tongues 35. Furthermore, the baseplate 33 has four grounding clips 36, via which an electrical connection can be produced to contact pads or printed circuit boards which cannot be seen. The input contacts 10, 20 are connected to the output contacts 30, 40 via these printed circuit boards. In this case, two input contacts 10 (which are associated with one double core) in the first row and input contacts 20 in the second row are in each case electrically connected to the output contacts 30, 40 of an RJ-45 female connector 31, 41 via the printed circuit boards. In this case, the input contacts 10 are only used for connecting cores via which data is transmitted to the STM1 module, and the input contacts 20 are only used for connecting cores via which data transmitted by the subscriber is transmitted. The four connected contacts in an RJ-45 female connector 31, 41 are thus connected to two input contacts 10 in the first row and to two input contacts 20 in the second row. If, for example, it is now intended to connect an RJ-45 female connector 41 to the associated input contacts 10, 20, then the connection for the input contacts 20 can be made virtually straight, while, in contrast, the connection from the input contacts 10 in the housing must be crossed over from top to bottom. The conditions for making contact with an RJ-45 female connector 31 correspond to this, but are reversed. This crossing-over is preferably carried out via two mutually opposite printed circuit boards within the housing, as will be explained in more detail later. This means that the two transmission directions are arranged such that they are clearly separated from one another on the input side, which [lacuna] the connection, measurement and testing. On the output side, on the other hand, prefabricated cables can be used very easily and in a simple manner for jumpering since the output contacts which are associated with one channel are integrated in one plug connector. Since, normally, jumpering has to be carried out more frequently on the output side than on the input side, the connecting elements 34 may also be reversed so that the RJ-45 female connectors 31, 41 are freely accessible after latching onto the profiled rod. More or less than eight channels may, of course, be connected in one distribution box connection module 1.

Figure 4 shows a plan view of the distribution box connection module 1. In this case, each associated pair of input contacts 10, 20 has an associated externally accessible isolating contact 13, and in this context reference may be made, for example, to DE 100 29 649 A1 with regard to the configuration of the isolating contact 13. At this point, it should be noted that the input contacts may also be formed with further contacts for connection of a shield. In

this case, three insulation displacement terminal contacts 11, 21 would in each case be associated with one double core. Four RJ-45 female connectors 31 are arranged on the face of the printed circuit board 50 which faces the output side. The front part 12 is latched by means of the insulation displacement terminal contacts 11 onto the face of the printed circuit board 50 which faces the input side, with the insulation displacement terminal contacts, which are formed with fork contacts, being pushed onto contact pads on the printed circuit board 50. The input contacts of these contact pads are then connected via core tracks, which are not shown, to contact points 16 and/or directly to RJ-45 female connectors 31.

Figure 6 shows two printed circuit boards 50 as shown in Figure 5, which are connected to one another via a flat ribbon cable 17 at the contact points 16. Eight input contacts 10 are looped through to the lower printed circuit board 50 and eight input contacts 20 are looped through to the other printed circuit board 50, via, respectively, the contact points 16 and the flat ribbon cable 17.

The distribution box connection module 1 may be extended in a modular fashion, so that a large number of rows may be arranged horizontally instead of the two rows of input and output contacts described. Furthermore, one plug connector may also have more than four associated cores.

LIST OF REFERENCE SYMBOLS

S_1-S_n	Transmission modules
E_1-E_n	Receiving modules
SE	Transmission unit
EE	Receiving unit
FK	Telecommunications cable
PK	Patch cable
STM1	STM1-module
E	Input side
A	Output side
1	Distribution box connection
10	Input contact
11	Insulation displacement terminal contact
12	Front part
13	Isolating contact
16	Contact point
17	Flat ribbon cable
20	Input contact
21	Insulation displacement terminal contact
22	Front part
30	Output contact
31	RJ-45 female connector
32	Side walls
33	Baseplate
34	Connecting elements
36	Grounding clip
40	Output contact
41	RJ-45 female connector
50	Printed circuit board

PATENT CLAIMS

1. A distribution box connection module for telecommunications and data technology, comprising a housing in which externally accessible input and output contacts are arranged for the connection of cables and cores, with the housing having a cavity in which at least one printed circuit board is arranged, with the input and output contacts being arranged on the opposite end faces of the housing, and with the input contacts being associated with one input side and the output contacts being associated with one output side,

wherein

the input contacts (10, 20) are in the form of at least two mutually opposite rows of contacts, and the output contacts (30, 40) are in the form of at least one plug connector, with at least two input contacts (10) in the first row and at least two input contacts (20) in the second row being connected to the output contacts (30; 40) in the at least one plug connector, and with the input contacts (10, 20) in the first row and in the second row being connected via the at least one printing circuit board (50) to the output contacts (30; 40) in the plug connector.

2. The distribution box connection module as claimed in claim 1, wherein the input contacts (10, 20) are in the form of insulation displacement terminal contacts (11, 21).

3. The distribution box connection module as claimed in claim 1 or 2, wherein the plug connectors are in the form of RJ-45 female connectors (31, 41).

4. The distribution box connection module as claimed in one of the preceding claims, wherein the output contacts (30, 40) are in the form of two mutually opposite rows of plug connectors.

5. The distribution box connection module as claimed in one of the preceding claims, characterized in that two mutually opposite printed circuit boards (50) are arranged within the housing and are electrically connected to one another.

6. The distribution box connection module as claimed in claim 5, wherein the printed circuit boards (50) are connected to one another via a flat ribbon cable (17).

7. The distribution box connection module as claimed in one of the preceding claims, wherein function and/or protection elements are arranged on the printed circuit board (50), and are arranged electrically between the input and output contacts (10, 20, 30, 40).

8. The distribution box connection module as claimed in claim 7, wherein the protection elements are in the form of overvoltage protection elements or circuits.
 9. The distribution box connection module as claimed in one of the preceding claims, wherein the housing is formed from two or more parts, with at least part of the housing being composed of metal.
 10. The distribution box connection module as claimed in claim 9, wherein the metal housing is formed with grounding clips (36), which are connected to contact pads on the printed circuit board (50).
 11. The distribution box connection module as claimed in claim 9 or 10, wherein the metal housing is formed with connecting elements (34) for profiled rods and/or rails.
 12. The distribution box connection module as claimed in one of the preceding claims, wherein the input contacts (10, 20) have associated isolating contacts (13).
-

FIG.1

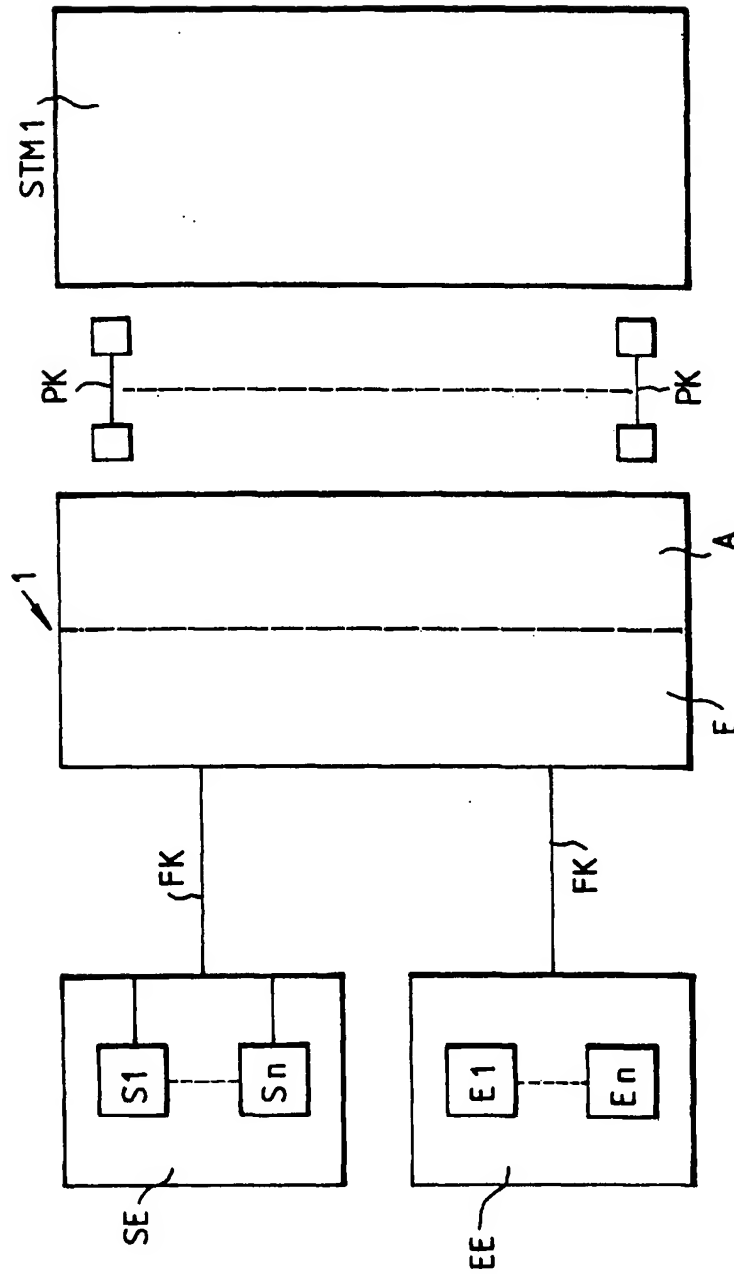


FIG.2

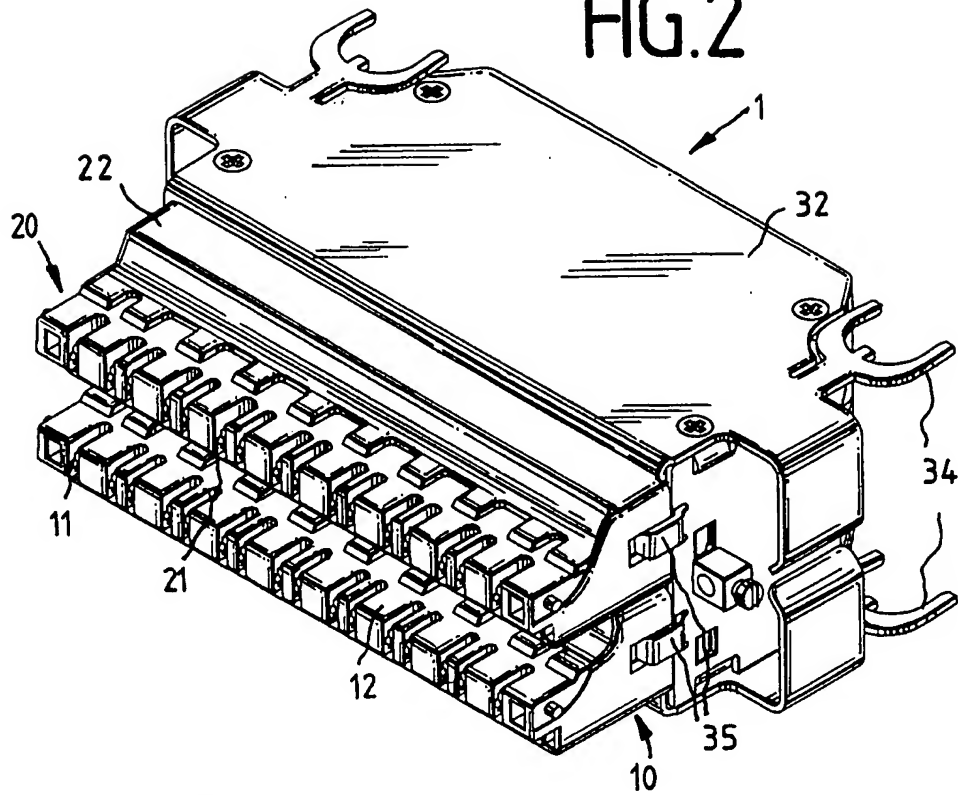


FIG.3

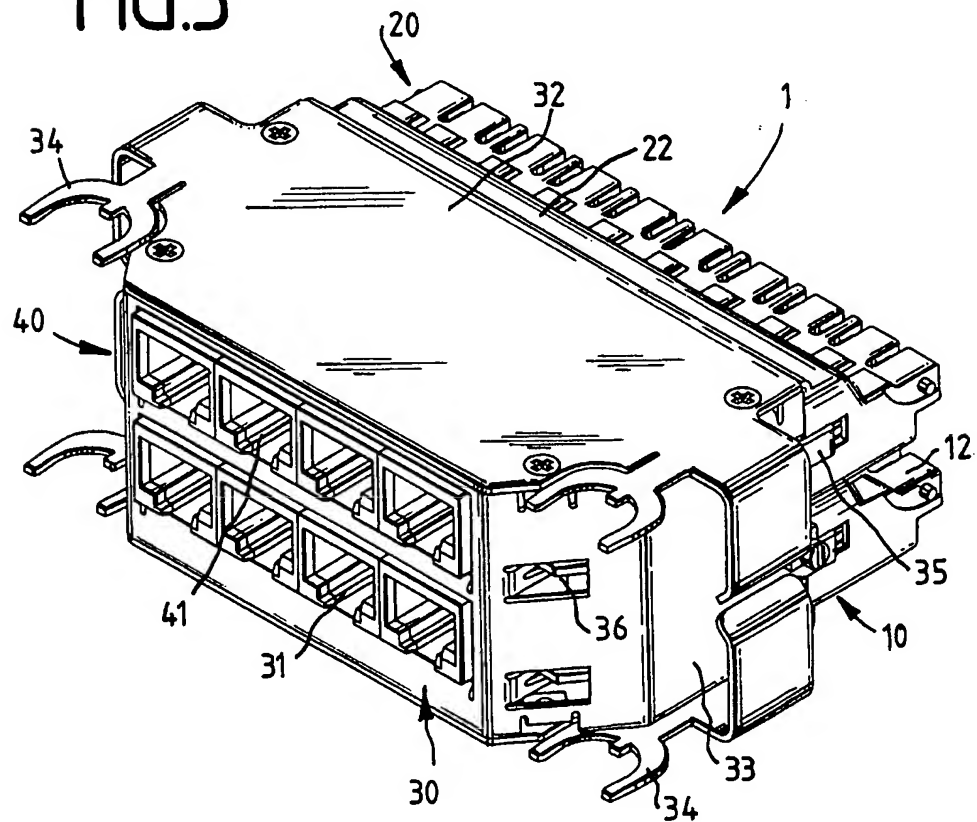


FIG.4

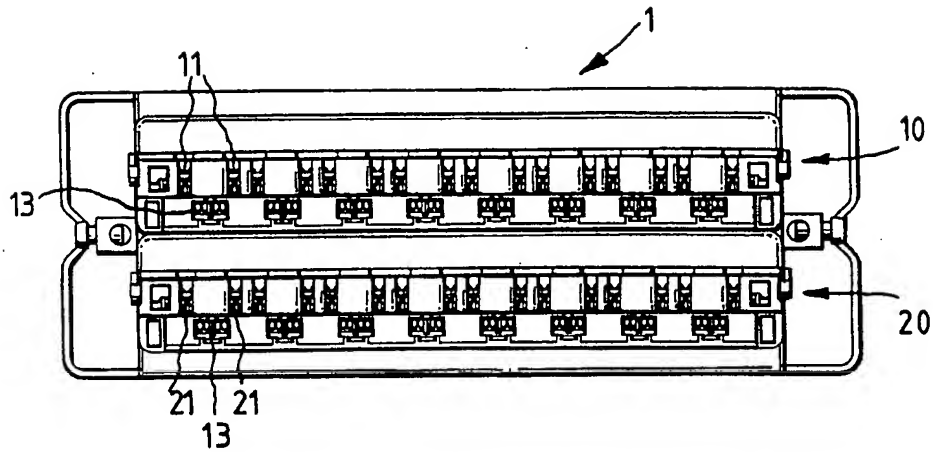


FIG.5

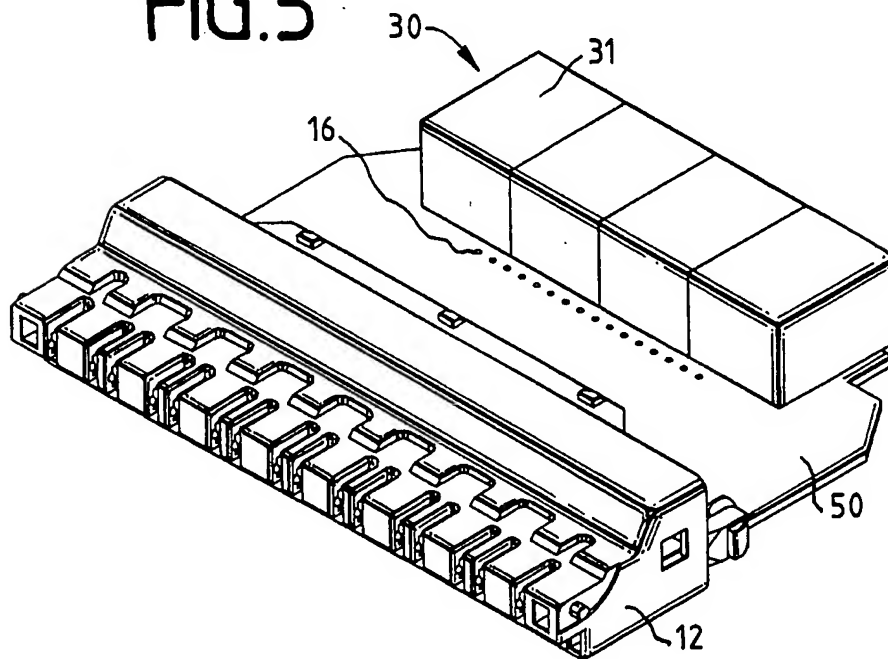


FIG.6

